

IRM-2 Stand

Infrared lacquer dryer for short drying time

Stand for simple spot repair use at the lacquer drying.

Incredible universal usable !

For all drying works from the roof to the sill !

With a few handgrips upgrade- and convertible !


The IR-modules are optionally mountable at the frame, movable and rotatable.

Optron IR-modules work in a shortwave IR-range.

The shortwave energy penetrates the lacquer coating and dries it from the inside. This means being able to work with higher performance output without having to risk bubble formation, which results in a shorter drying time.

- ▶ 100% power within 1-2 seconds
- ▶ connected value: max. 2 IR-modules à 3 kW; 400 V + N + PE (50/60 Hz)
- ▶ Power switchable in two steps (50% or 100%)
- ▶ IR-modules with Harting-connectors
- ▶ timer switch: 0 ... 30 min.
- ▶ In the IR-modules integrated fans guarantees also at continuous operation small casing temperature and long lifetime of the IR-emitter
- ▶ all adjustments lockable through rotary levers
- ▶ drying surface: approx. 0.9 x 0.5 m (per 3kW IR-module)
- ▶ working distance: 55 cm
- ▶ material: stainless steel (foot and frame) and aluminium (IR-modules)
- ▶ small ground clearance of the driving stand (80 mm)
- ▶ 10 m connecting cable with 16 A CEE-plug
- ▶ weight: approx. 20 kg

By loosening the star screw the IR-modules can be mounted at the vertical or horizontal frame. There are 2 clamps at the vertical and 2 clamps at the horizontal frame.

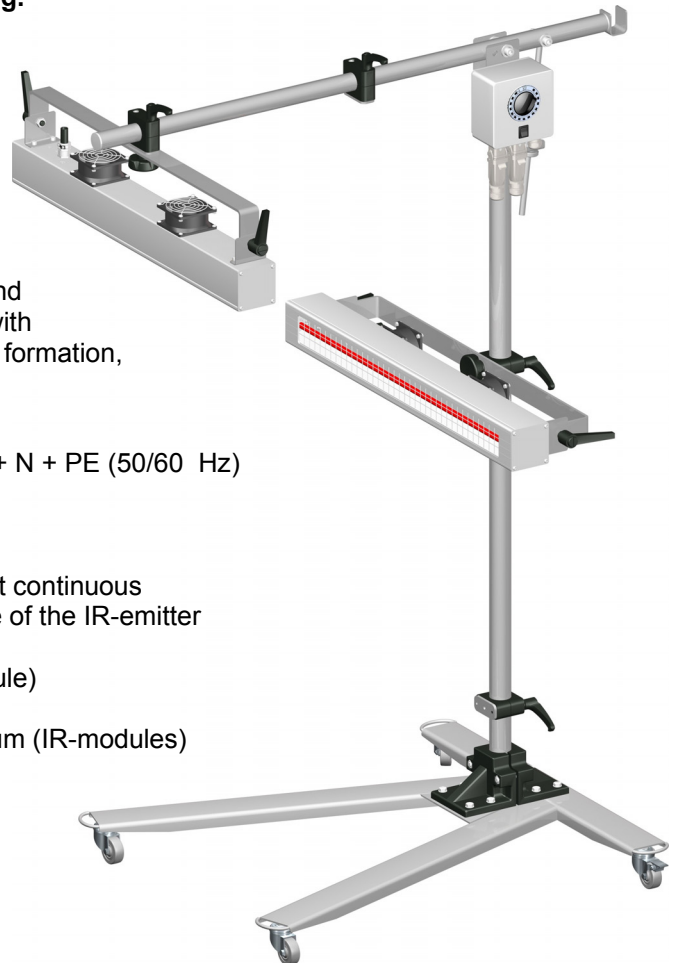

views without cables



injury protection



timer switch, cable suspension,
height adjustment

Alle Preise zzgl. gesetzl. MwSt.

Z:\Publishingdaten\prospekte\infrarotstrahler\stativ\irm_2\irm_2_eng.doc

Abbildung ähnlich
Stand-Dokumentation: 22.06.2020

IRM-2 Stand

Infrared lacquer dryer for short drying time


Possibility of positioning the IR-modules

By loosening the locking lever ①
the IR-modules can be moved on the frame.


By loosening the star screw ②
the whole module can be rotated.

To mount the IR-module
loosen the star screw ② completely.

For incline the IR-module please loosen the locking lever ③.

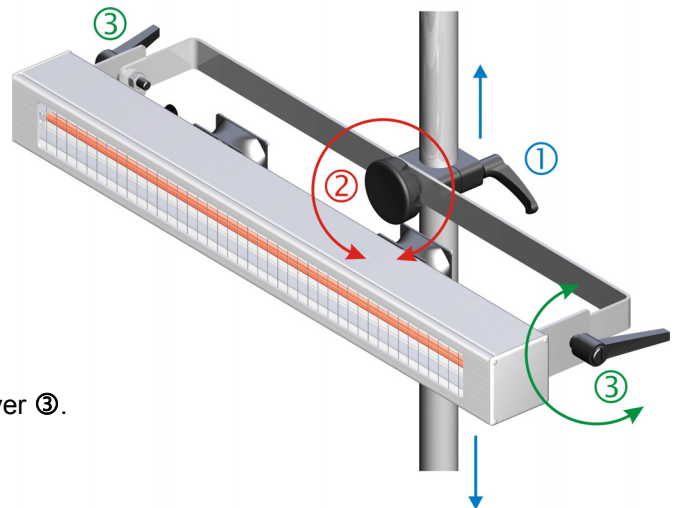

Dimensioned drawing

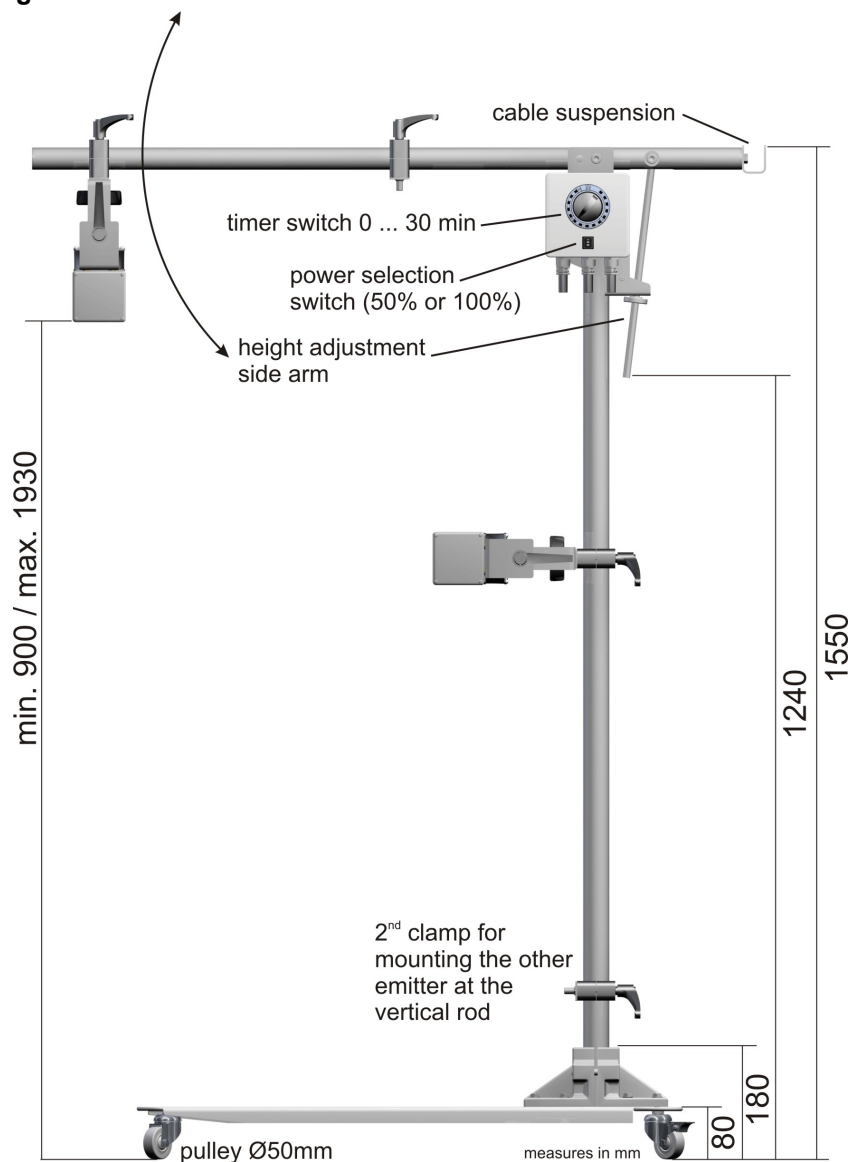

IRM-2 Stand

Infrared lacquer dryer for short drying time

IR-modules for IRM-2 stand incl. mounting bracket,
rotary levers and connection cable with Harting plug.


IR-module 380 K

2 kW, shortwave IR-emitter

applicable for IRM-2 and KL-3 stands

length 380 mm

Item-no.: 600.1759

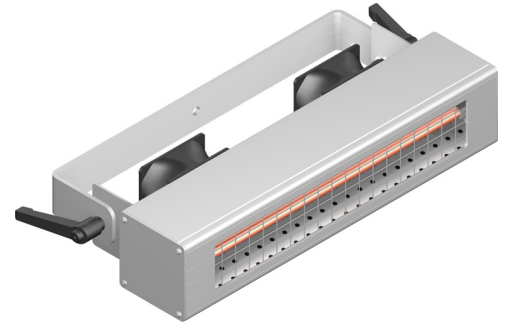

IR-module 380 SM

**2 kW, fast medium wave IR-emitters
with reduced dazzle effect**

applicable for IRM-2 and KL-3 stands

length 380 mm

Item-no.: 600.1960


IR-module 750 K

3 kW, shortwave IR-emitter

applicable for IRM-2 and KL-3 stands

length 750 mm

Item-no.: 600.1961

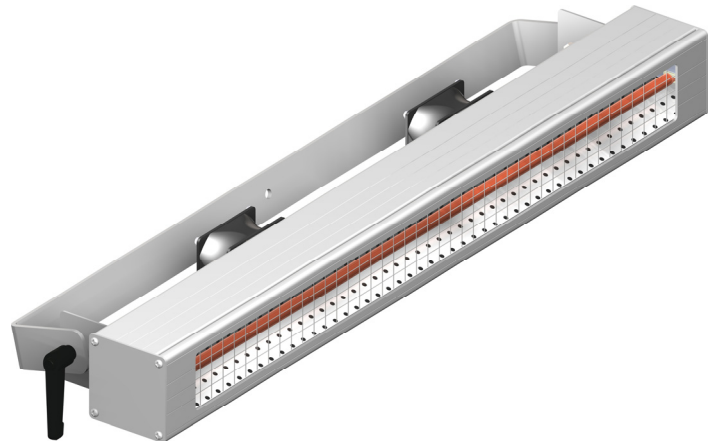

IR-module 750 SM

**3 kW, fast medium wave IR-emitters
with reduced dazzle effect**

applicable for IRM-2 and KL-3 stands

length 750 mm

Item-no.: 600.1962