



Type IRD ... / Overview

IRD S380N – 3 kW / 400 V + N + PE (50/60 Hz);
1 **NIR IR-emitter** (IR-emitter: 600.1164);
heated length 284mm; ceramics reflector; universal position of installation
item no.: 600.1044

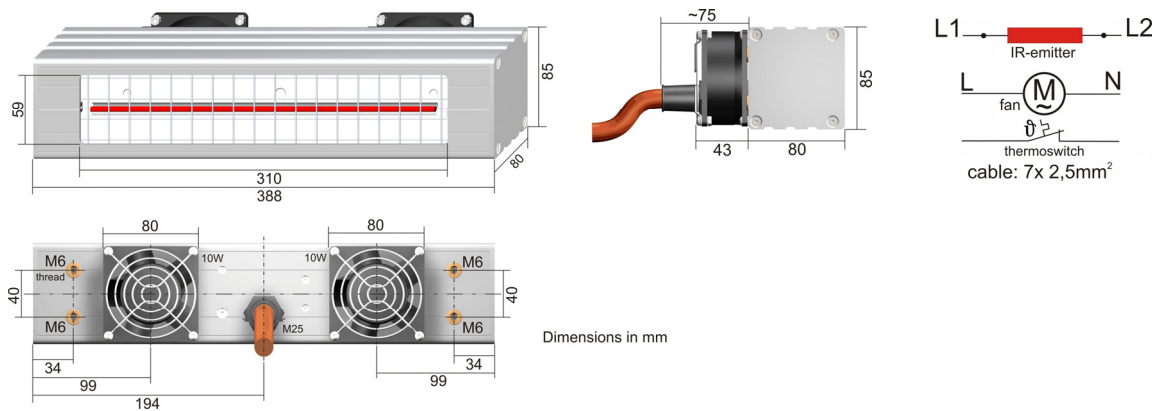

IRD E380DN – 3x 3 kW / 400 V + N + PE (50/60 Hz);
3 **NIR IR-emitters** (IR-emitter: 600.1164);
heated length 284mm; ceramics reflector; universal position of installation
item no.: 600.1033.1

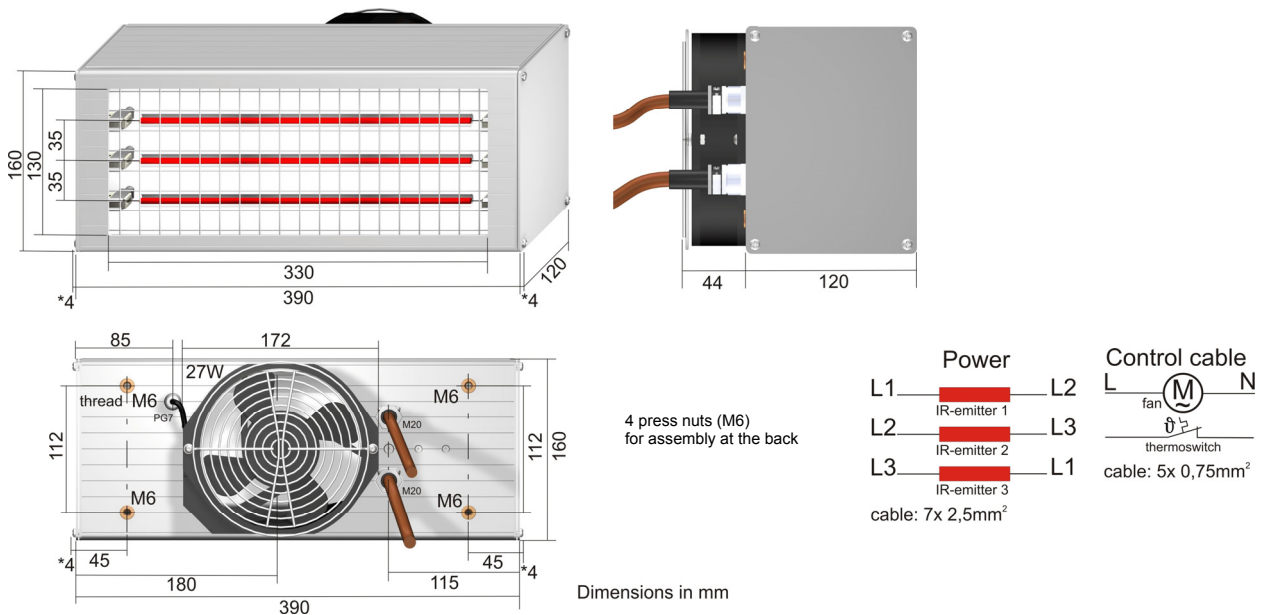

All models are delivered with 2m silicone connection cable for terminal connection.

Additional available:

Mounted protective contact plug (only at 230 V AC up to 3 kW)

Additional meter control cable (5G0.75mm²)

Additional meter connection cable (230 V AC modules / 4G2.5mm²)

Additional meter connection cable (400 V AC modules / 5G2.5mm²)

Additional meter connection cable (400 V AC modules / 7G2.5mm²)

item number:

600.1107

600.1121

600.1110

600.1122

600.1222

All prices excl. VAT

Z:\Publishingdaten\prospekte\infrarotstrahler\strahler\typenuebersicht-NIR_eng.doc

All pictures are approximations
Last update: 25.11.2019